

OASIS

CI/SfB (35) Xy
02/2011



www.armstrong.es/techos
www.armstrong.com.tr

Armstrong®

OASIS



Recycled Content




Light Reflectance

OASIS

BOARD



Prelude XL²/TLX 24 mm
Prelude Sixty²



600 x 600 x 12 mm


9923 M



EN ISO 354 &
EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
0.15(L)	0.15	0.30	0.25	0.15	0.10	0.10	0.20	α_p

Sound Absorption Class = E

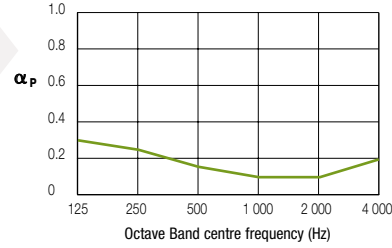

EN ISO 10848-2
/ EN 20140-9
& EN ISO 717-1

Dncw
33 dB



EN 13501-1

EEA Euroclass A2-s1, d0



EN 12667
& ISO 8301

$\lambda = 0.06$ W/m K



90 % RH



≈ 2.9 kg/m²

Printed in E.C. on chlorine free paper from sustainable resources.
Armstrong Building Products R.C.S. Besançon B 784 131 575

PX1105
PEFC
certified

- El acabado de las placas puede variar ligeramente si proceden de fábricas distintas.
- Daha fazla bilgi için lütfen Armstrong temsilcinize danışınız.

www.armstrong.es/techos
www.armstrong.com.tr

Armstrong®